

PANELLI[®]

info@panellipumps.it

www.panellipumps.it

95 SX

4"



**Stainless steel
submersible pumps
AISI 304**




Casted



MADE IN ITALY

- Superior efficiency
- High Energy Saving
- Corrosion resistance
- Performance
- Heavy Duty construction


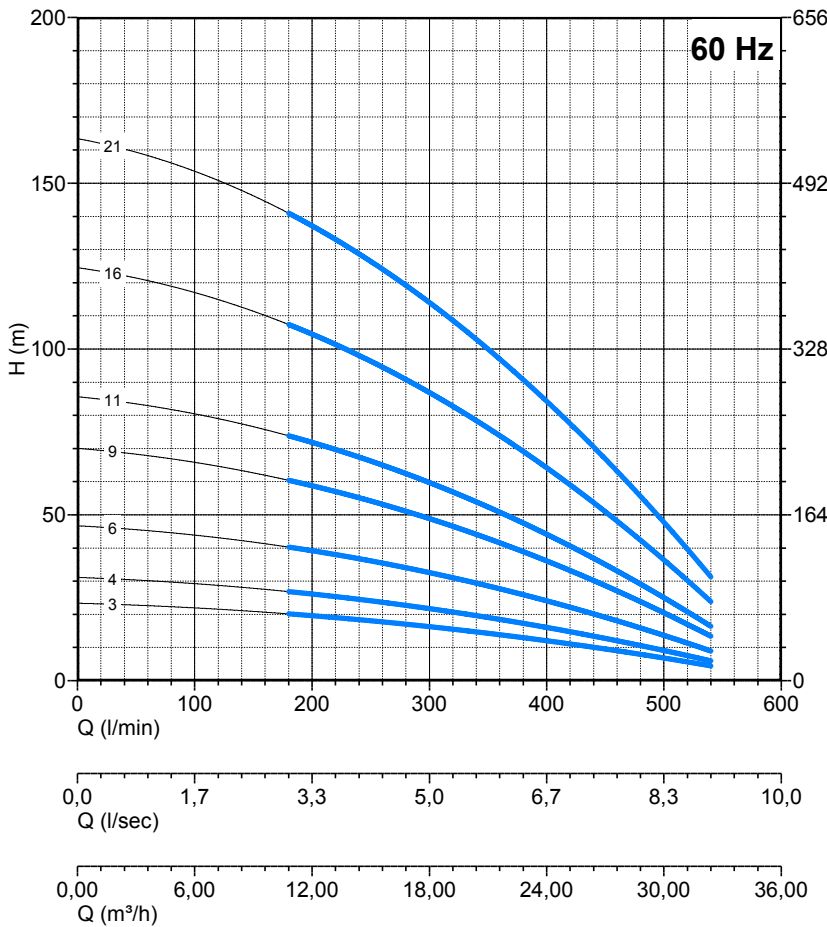


H = Prevalenza totale. **Da 5 a 142 m**
Q = Portata. **Da 180 a 540 l/min**
n% = Rendimento della pompa. **Max 76,5 %**
W/st = Assorbim. per stadio. **Max 349,60**
Massimo contenuto di sabbia. 50 g/m³
S = Battente minimo (m) **1**

H = Total head. **From 5 to 142 m**
Q = Capacity. **From 180 to 540 l/min**
n% = Pump efficiency. **Max 76,5 %**
W/st = Stage absorption. **Max 349,60**
Maximum sand content 50 g/m³
S = Minimum head (m) **1**

H = hauteur manométrique. **From 5 to 142 m**
Q = Débit. **From 180 to 540 l/min**
n% = Rendement de la pompe. **Max 76,5 %**
W/st = Absorption par étage. **Max 349,60**
Contenu maximal de sable. 50 g/m³
S = Niveau minimal (m). **1**

H =Altura manométrica. **Da 5 a 142 m**
Q = Caudal. **De 180 a 540 l/min**
n% = Rendimiento de la bomba. **Max 76,5 %**
W/st = Potencia absorbida por etapa. **Max 349,60**
Condenido máximo de arena. 50 g/m³
S = Nivel mínimo (m) **1**

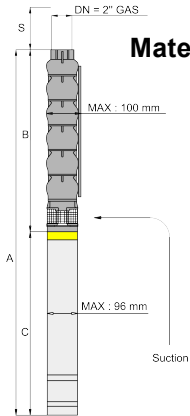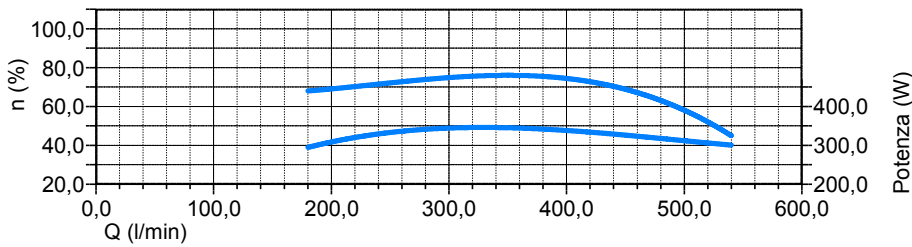

**Material : AISI 304
 CASTED**

60 Hz Motore - Motor - Moteur Caratteristiche a 3450 rpm						Q=Portata - Capacity - Debit									
Tipo - Type	Power		Mono Fase Single phase V230		V 400	Q=Portata - Capacity - Debit									
	kW	HP	A	F	A	l/min	0	180	240	300	360	420	480	540	
						l/sec	0,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	
						m³/h	0,0	10,8	14,4	18,0	21,6	25,2	28,8	32,4	
95 SX 18/03	1,10	1,5	9,6	40	3,2	H[m]	23	20	18	16	14	11	8	5	
95 SX 18/04	1,50	2	11,8	50	4		31	27	24	22	18	15	10	6	
95 SX 18/06	2,20	3	15,2	76	5,8		47	41	36	33	28	22	16	9	
95 SX 18/09	3,00	4	-	-	7,5		70	61	54	49	41	34	23	14	
95 SX 18/11	4,00	5,5	-	-	9,8		86	74	66	60	51	41	29	17	
95 SX 18/16	5,50	7,5	-	-	13,5		124	108	96	88	74	60	42	24	
95 SX 18/21	7,50	10	-	-	17,5		163	142	126	115	97	78	55	32	

Dimensioni di ingombro e pesi Overall dimensions and weights									
Tipo - Type	A mm Mono	A mm Tri	B mm	C mm Mono	C mm Tri	M kg Mono	M kg Tri	P kg	
95 SX 18/03	784	754	392	392	362	12	12	7	
95 SX 18/04	887	857	465	422	392	13	13	10	
95 SX 18/06	1078	1063	611	467	452	15	15	13	
95 SX 18/09	0	1387	830	0	557	0	19	17	
95 SX 18/11	0	1573	976	0	597	0	22	23	
95 SX 18/16	0	2039	1341	0	698	0	27	31	
95 SX 18/21	0	2524	1706	0	818	0	32	39	