







**2019 WASTECORP HONEY WAGON BROCHURE  
WASTE CONTAINMENT SYSTEMS**

# Wastecorp Honey Wagon - Range Overview

| OVERVIEW   | PRODUCT  | TECHNICAL SPECIFICATIONS   | PAGE       |                |               |   |                   |             |                     |               |                 |               |                  |
|--|--|--|------------|----------------|---------------|---|-------------------|-------------|---------------------|---------------|-----------------|---------------|------------------|
| <ul style="list-style-type: none"> <li>■ Designed for self service marinas, boat owners and RV's</li> <li>■ Maneuvers easily in tight spaces</li> <li>■ Features the heavy duty Sludge Sucker® hand pump series</li> </ul>   | <p><b>Pump Out Caddy</b></p>  | <table border="1"> <tr> <td>Tank size</td> <td>25 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Caddy w/handles</td> </tr> <tr> <td>Max. suction lift</td> <td>15'</td> </tr> <tr> <td>Max. discharge head</td> <td>15'</td> </tr> <tr> <td>Connection size</td> <td>1"-1½"</td> </tr> </table>  | Tank size  | 25 gallon      | Trailer/frame | Caddy w/handles                             | Max. suction lift | 15'         | Max. discharge head | 15'           | Connection size | 1"-1½"        | <p><b>8</b></p>  |
| Tank size  | 25 gallon  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Trailer/frame  | Caddy w/handles  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. suction lift  | 15'  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. discharge head  | 15'  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Connection size  | 1"-1½"   |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| <ul style="list-style-type: none"> <li>■ Small-medium pump out applications</li> <li>■ Exclusive three way valve system to pump liquid either into or out of the tank with one pump</li> <li>■ Features the heavy duty Mud Sucker® FA series with gas, electric diesel and models available</li> </ul> | <p><b>HW-50</b></p>           | <table border="1"> <tr> <td>Tank size</td> <td>50 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, ATV trailer, Utility</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½" or 2"</td> </tr> </table>                  | Tank size  | 50 gallon      | Trailer/frame | Stationary, ATV trailer, Utility            | Max. suction lift | 20' v/75' h | Max. discharge head | 50' v /300' h | Connection size | 1½" or 2"     | <p><b>9</b></p>  |
| Tank size  | 50 gallon  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Trailer/frame  | Stationary, ATV trailer, Utility   |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. suction lift  | 20' v/75' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. discharge head  | 50' v /300' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Connection size  | 1½" or 2"  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| <ul style="list-style-type: none"> <li>■ Medium duty pump out applications</li> <li>■ Connects to utility vehicles like the John Deere Gator® and Bobcat®</li> <li>■ Special packages available for train station/locomotive applications, golf courses and more</li> </ul>                            | <p><b>HW-100-200</b></p>    | <table border="1"> <tr> <td>Tank sizes</td> <td>100-200 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Trolley/utility style</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½" or 2"</td> </tr> </table>                       | Tank sizes | 100-200 gallon | Trailer/frame | Trolley/utility style                       | Max. suction lift | 20' v/75' h | Max. discharge head | 50' v /300' h | Connection size | 1½" or 2"     | <p><b>10</b></p> |
| Tank sizes   | 100-200 gallon   |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Trailer/frame  | Trolley/utility style  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. suction lift  | 20' v/75' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. discharge head  | 50' v /300' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Connection size  | 1½" or 2"  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| <ul style="list-style-type: none"> <li>■ Great size for many medium-heavy duty pump outs</li> <li>■ Step deck for easy system inspection</li> <li>■ Premium hose system and components for high demand applications</li> </ul>   | <p><b>HW-300</b></p>        | <table border="1"> <tr> <td>Tank size</td> <td>325 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility trailer or DOT approved</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table> | Tank size  | 325 gallons    | Trailer/frame | Stationary, utility trailer or DOT approved | Max. suction lift | 20' v/75' h | Max. discharge head | 50' v /300' h | Connection size | 1½", 2" or 3" | <p><b>11</b></p> |
| Tank size  | 325 gallons  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Trailer/frame  | Stationary, utility trailer or DOT approved  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. suction lift  | 20' v/75' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. discharge head  | 50' v /300' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Connection size  | 1½", 2" or 3"  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| <ul style="list-style-type: none"> <li>■ Designed with versatile mounting options for pump out vessels, customer enclosed facilities</li> <li>■ Heavy duty frame and cradle</li> <li>■ Wastewater, septic, waste oil and general waste containment needs</li> </ul>                                    | <p><b>HW-500</b></p>        | <table border="1"> <tr> <td>Tank size</td> <td>525 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility trailer or DOT approved</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table> | Tank size  | 525 gallons    | Trailer/frame | Stationary, utility trailer or DOT approved | Max. suction lift | 20' v/75' h | Max. discharge head | 50' v /300' h | Connection size | 1½", 2" or 3" | <p><b>16</b></p> |
| Tank size  | 525 gallons  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Trailer/frame  | Stationary, utility trailer or DOT approved  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. suction lift  | 20' v/75' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Max. discharge head  | 50' v /300' h  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |
| Connection size  | 1½", 2" or 3"  |  |            |                |               |   |                   |             |                     |               |                 |               |                  |

| OVERVIEW  | PRODUCT   | TECHNICAL SPECIFICATIONS  | PAGE             |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
|---|---|---|------------------|-------------------|------------------|--------------------------|-------------------|----------------------------------|---------------------|---------------|---------------------|---------------|------------------|---------------|------------------|
| <ul style="list-style-type: none"> <li>■ Designed for heavy duty containment of septic waste, wastewater and oil</li> <li>■ Rear discharge with premium brass fittings</li> <li>■ Galvanized deck and frame for the ultimate in corrosion resistance</li> </ul> | <p><b>HW-1000</b></p>                  | <table border="1"> <tr> <td>Tank size</td> <td>1025/1035 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Tandem axle/heavy duty</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v /75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>  | Tank size        | 1025/1035 gallons | Trailer/frame    | Tandem axle/heavy duty   | Max. suction lift | 20' v /75' h                     | Max. discharge head | 50' v /300' h | Connection size     | 1½", 2" or 3" | <p><b>17</b></p> |               |                  |
| Tank size   | 1025/1035 gallons   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Trailer/frame   | Tandem axle/heavy duty  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. suction lift   | 20' v /75' h  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. discharge head   | 50' v /300' h   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Connection size   | 1½", 2" or 3"   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| <ul style="list-style-type: none"> <li>■ Triple axle DOT approved trailer for the ultimate in stability</li> <li>■ Standard hose bin</li> <li>■ Electric brakes, lighting package, choice of pump and configuration options</li> </ul>                          | <p><b>HW 1600</b></p>                  | <table border="1"> <tr> <td>Tank size</td> <td>1635 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Triple axle w/heavy duty</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v /75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>   | Tank size        | 1635 gallons      | Trailer/frame    | Triple axle w/heavy duty | Max. suction lift | 20' v /75' h                     | Max. discharge head | 50' v /300' h | Connection size     | 1½", 2" or 3" | <p><b>18</b></p> |               |                  |
| Tank size   | 1635 gallons  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Trailer/frame   | Triple axle w/heavy duty  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. suction lift   | 20' v /75' h  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. discharge head   | 50' v /300' h   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Connection size   | 1½", 2" or 3"   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| <ul style="list-style-type: none"> <li>■ Dually axle with pintle hook and goose neck trailer available</li> <li>■ Rear discharge with premium brass fittings</li> <li>■ Configure with any Mud Sucker brand diaphragm pump</li> </ul>                           | <p><b>HW 2000-5000</b></p>           | <table border="1"> <tr> <td>Tank sizes</td> <td>2035-5025 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Varies</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v /75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>   | Tank sizes       | 2035-5025 gallons | Trailer/frame    | Varies                   | Max. suction lift | 20' v /75' h                     | Max. discharge head | 50' v /300' h | Connection size     | 1½", 2" or 3" | <p><b>19</b></p> |               |                  |
| Tank sizes  | 2035-5025 gallons   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Trailer/frame   | Varies  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. suction lift   | 20' v /75' h  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. discharge head   | 50' v /300' h   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Connection size   | 1½", 2" or 3"   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| <ul style="list-style-type: none"> <li>■ Waste tank and water tank</li> <li>■ Dual pump system</li> <li>■ You select the tank size combination for your job</li> </ul>  | <p><b>Dual Tank Waste+Water</b></p>  | <table border="1"> <tr> <td>Waste tank sizes</td> <td>150-725 gallons</td> </tr> <tr> <td>Rinse tank sizes</td> <td>Up to 300 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility or DOT rated</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v /75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table> | Waste tank sizes | 150-725 gallons   | Rinse tank sizes | Up to 300 gallons        | Trailer/frame     | Stationary, utility or DOT rated | Max. suction lift   | 20' v /75' h  | Max. discharge head | 50' v /300' h | Connection size  | 1½", 2" or 3" | <p><b>20</b></p> |
| Waste tank sizes  | 150-725 gallons   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Rinse tank sizes  | Up to 300 gallons   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Trailer/frame   | Stationary, utility or DOT rated  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. suction lift   | 20' v /75' h  |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Max. discharge head   | 50' v /300' h   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |
| Connection size   | 1½", 2" or 3"   |   |                  |                   |                  |                          |                   |                                  |                     |               |                     |               |                  |               |                  |



# YOUR WASTE CONTAINMENT SYSTEM. AS EASY AS 1-2-3.

With a Wastecorp waste containment system you get to build and price your system to suit your needs. Start with the pump, the mounting, the types of tires, tank and accessories and you're done.

## SELECT YOUR MOUNTING.



DOT Compliant



Off Road Trailer



ATV/Trolley Mount



Stationary

## SELECT YOUR PUMP.



1.5"-2" Connection  
Up to 20 GPM



3" Connection  
Up to 80 GPM



4" Connection  
Up to 110 GPM

## SELECT YOUR TANK.



Waste Tank Only  
25-5000+ Gallons



Water + Waste Tank  
Various Combos



# SO MANY USES. SO MANY WAYS YOU BENEFIT.

There are so many ways you can use your Wastecorp waste containment system. From septic pumping, waste oil recovery and temporary storage to pumping out wastewater from flooded areas, you get the ultimate in quality and performance. Select from 25 to over 500 gallon tank sizes and the mounting of your choice.





# WASTE CONTAINMENT SYSTEMS BUILT FOR PROFESSIONALS, BY PROFESSIONALS.




## HEAVY DUTY POLYETHYLENE TANKS

Provide superior durability with access ports that conform to your needs. With Wastecorp honey wagons, use either the pump or the gravity port to empty the tank quickly and easily.

## THREE WAY VALVE SYSTEM

Wastecorp's exclusive three way valve design enables you to pump wastewater into the honey wagon tank and extract it with the same pump. Simply turn the lever to pump in or out.

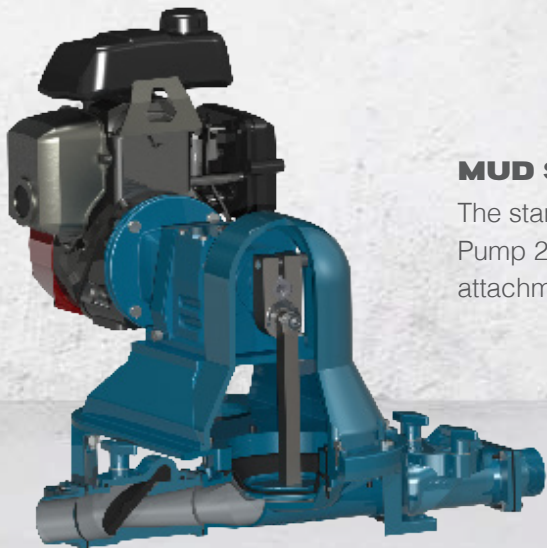


## MUD SUCKER DIAPHRAGM PUMP TECHNOLOGY

The standard model features your choice of the Mud Sucker Diaphragm Pump 2FAC-EC (electric) model or 2FAC-M (engine) and all hosing and attachments.

## PROFESSIONAL ENGINEERING

It doesn't matter if you are pumping out portable toilets or completing a remediation project for a client or at your own site. You need a professional grade pump out system to enhance your productivity. Wastecorp delivers.

*Shown Right: HW-500 Series with a 525 gallon tank, Mud Sucker 2FA-M pump technology with a Hatz diesel engine, deck mounted utility box, three way valve system, hose reel for up to 50 ft. of hose.*

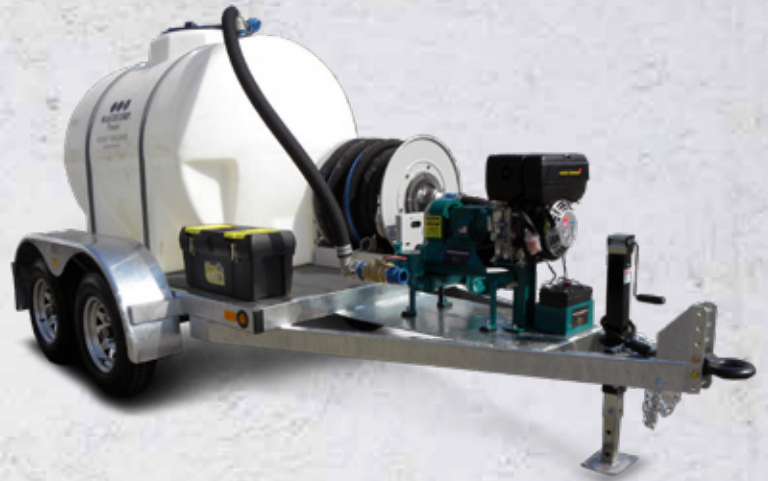

## CUSTOM OPTIONS

Need a higher capacity pump? How about lockable hose storage cabinets that resist weather? Have you considered a spare tire or a fire extinguisher? Wastecorp's custom options help you configure your waste containment system completely to your needs.

*Shown: HW-1000 Series with a 1035 gallon tank, Mud Sucker 3FA-M pump technology rated for up to 80 GPM, lockable storage cabinets and spare tire option.*

## CUSTOM CONTROL PANELS AND DRIVES AVAILABLE

Wastecorp can custom design your waste containment system to your specifications. Control panels, professional grade hose reels and over five types of motors are available. Consider Wastecorp your custom pump shop.

Gas, diesel, hydraulic, pneumatic, single or three phase electric and explosion proof motors available.



*Shown: HW-150 Series, 150 gallon tank, air driven motor, push button start/stop control panel, ATV towing package, custom hose reel for non-collapsible hose.*



# Wastecorp Pump Out Caddy - WC-25



## WC-25 Pump Out

**Applications** Designed for self service marinas or campgrounds. Boat owners and RV owners for safe and quick pump outs. Maneuvers easily in tight spaces.

|              |   |
|--------------|---|
| <b>Caddy</b> | Welded aluminum, polyurethane coating, two wheeled cart design -12" pneumatic tires |
| <b>Tank</b>  | 25 gallon polyethylene tank   |
| <b>Hose</b>  | 1½" x 20' suction hose  |

## Pump and Motor Specifications

|                                |                           |
|--------------------------------|---------------------------|
| <b>Connection size</b>         | 1½"                       |
| <b>Max. liquid temperature</b> | 140°F (60°C) continuous   |
| <b>Pump body casing</b>        | Marine grade aluminum     |
| <b>Diaphragm</b>               | 7" dia. fabric reinforced |
| <b>Flapper valves</b>          | Fabric reinforced         |

## Performance Range

|                            |                         |
|----------------------------|-------------------------|
| <b>Max. capacity</b>       | 10 GPM                  |
| <b>Max. suction lift</b>   | 15 ft                   |
| <b>Max. discharge head</b> | 15 ft.                  |
| <b>Solids handling</b>     | 1" dia or 50% by volume |

Wastecorp's WC-25 pump out caddy features a sturdy frame and all premium marine grade components.

## WC-25 Series Model Selection

| Model                | Part no. |
|----------------------|----------|
| WC-25 Pump Out Caddy | 63696-00 |

## Accessories for Salt Water Environments

| Description  | Part no. |
|--|----------|
| Internals Protector Package: Stainless steel check valve seat, viton flappers, stainless steel weights, Viton gaskets and hardware | 60633-08 |
| 304 SS clamping plate  | 60452-06 |
| Wet section epoxy coating  | 61184-50 |

## Spare Parts and Accessories

| Description  | Part no. |
|--|----------|
| Standard Spare Parts Kit: rubber diaphragm, Viton flappers, steel weights and standard gaskets | 62754-00 |
| Premium Spare Parts Kit: Viton diaphragm, Viton flappers, SS weights and Viton gaskets         | 62754-06 |
| Potty suction wand 1.5" x 24" L  | 62264-00 |
| Potty suction wand 1.5" x 36" L  | 63267-00 |
| Potty suction wand 1.5" x 48" L  | 63269-00 |



## Wastecorp Honey Wagon HW-50



50 gallon - turf tire, trailer mounted model shown with gas engine and Mud Sucker 2FA Series diaphragm pump technology.

### HW-50 Series

|                    |  |
|--------------------|--|
| Mounting options   | Turf trailer mounted (shown), ATV tow package or stationary  |
| Tank               | 50 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve   |
| Hoses and Fittings | Qty: 1 - Suction Non-Collapsible EPDM Hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories |
| Valve              | 3-way valve system to empty tank using pump unit and 10' discharge hose  |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation   |

### Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 1.5" or 2" (2FAC-C Series)                             |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 7" dia. fabric reinforced                              |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

### Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 20 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia or 50% by volume        |



The HW-50 can be customized for your specific application like pumping out locomotive rest rooms and waste oil.

### HW-50 Series Model Selection

| Model  | Part no. |
|--|----------|
| HW-1.5FA-EC-50-C - 1.5" Electric Mobile Pump Out     | 63254-00 |
| HW-1.5FA-M-50-C - 1.5" Gas Mobile Pump Out           | 63250-00 |
| HW-2FA-M-50-C - 2" Gas Mobile Pump Out System        | 63258-00 |
| HW-2FA-EC-50-C - 2" Electric Mobile Pump Out         | 63262-00 |
| HW-1.5FA-EC-50-S - 1.5" Electric Stationary Pump Out | 63254-10 |
| HW-1.5FA-M-50-S - 1.5" Gas Stationary Pump Out       | 63250-10 |
| HW-2FA-M-50-S - 2" Electric Stationary Pump Out      | 63262-10 |
| HW-2FA-M-50-S - 2" Gas Stationary Pump Out           | 63258-10 |
| HW-2FA-EC-50-TT - 2" Electric Turf Tire Pump Out     | 64973-30 |
| HW-2FA-M-50-TT - 2" Gas Turf Tire Pump Out           | 64973-00 |

### Spare Parts and Accessories

| Description   | Part no. |
|---|----------|
| Basic Spare Parts Kit: diaphragm and flappers                                     | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware | 65060-00 |
| Potty Suction Wand 2" x 36" L   | 63245-00 |
| Bearing rod end and crank arm assembly  | 62830-00 |
| Universal RV sewer adapter kit  | 64042-00 |

### Coatings for Salt Water Environments

| Description                                | Part no. |
|--|----------|
| Pump internal wet section coating PTFE-DFL | 65156-50 |
| Pump internal wet section coating. Xylan   | 65156-60 |

# Wastecorp Honey Wagon 100-200 Utility Package



150 gallon model shown with Mud Sucker 2FA Series pump.



You specify the connection for your vehicle. Select from ATV, public transportation vehicles, Gator®, Bobcat® and much more.

## HW-100-200 Series

|                    |  |
|--------------------|--|
| Mounting options   | ATV tow package (shown above), turf tire trailer mounted or stationary   |
| Tank               | Your choice of 100, 150 or 200 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve   |
| Hoses and fittings | Qty: 1 - Suction non-collapsible EPDM hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories |
| Valve              | 3-way valve system to empty tank using pump Unit and 10' discharge hose  |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation   |

## Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 1.5" or 2"   |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 7" dia. fabric reinforced                              |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

## Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 20 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia or 50% by volume        |

## HW-100-200 Series Model Selection

| Model                                       | Part no. |
|---|----------|
| HW-100-200 1.5" Electric Mobile             | 63255-00 |
| HW-100-200 1.5" Gas Mobile                  | 63251-00 |
| HW-100-200 2" Gas Mobile                    | 63259-00 |
| HW-100-200 2" Electric Mobile Pump Out      | 63263-00 |
| HW-100-200 1.5" Electric Stationary         | 63255-10 |
| HW-100-200 1.5" Gas Stationary              | 63251-10 |
| HW-100-200 2" Electric Stationary (100 gal) | 65034-30 |
| HW-100-200 2" Gas Stationary (150 gal)      | 65035-10 |
| HW-100-200 2" Electric Turf Tire Trailer    | 64973-XX |
| HW-100-200 2" Engine Turf Tire Trailer      | 64973-XX |

## Spare Parts and Accessories

| Description   | Part no. |
|---|----------|
| Basic Spare Parts Kit: diaphragm and flappers                                     | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware | 65060-00 |
| Potty Suction Wand 2" x 36" L   | 63245-00 |
| Bearing rod end and crank arm assembly  | 62830-00 |
| Universal RV sewer adapter kit  | 64042-00 |

## Coatings for Salt Water Environments

| Description                                | Part no. |
|--|----------|
| Pump internal wet section coating PTFE-DFL | 65156-50 |
| Pump internal wet section coating. Xylan   | 65156-60 |



## Wastecorp Honey Wagon HW-300



Shown: HW-300-M-DT 325 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck.

### HW-300 Series

|                    |  |
|--------------------|--|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Utility Trailer:</b> not for public roads <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose stand or optional hose cage |
| Tank               | 325 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve  |
| Hoses and Fittings | Qty: 2 - non-collapsible EPDM Hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories   |
| Valve              | 3-way valve system to empty tank using pump Unit and discharge lay flat hose   |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation   |

### Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 1.5" or 2" (2FAC Series)                               |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 7" dia. fabric reinforced                              |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

### Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 20 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia or 50% by volume        |

### HW-300 Series Model Selection

| Model  | Part no. |
|--|----------|
| HW-300-EC-DT 325 gallon, DOT approved trailer mounted, electric motor, | 63730-20 |
| HW-300-EC-UT 325 gallon, utility trailer, electric motor               | 63730-10 |
| HW-300-EC-S 325 gallon, stationary, electric motor                     | 63730-00 |
| HW-300-M-DT 325 gallon, DOT approved, Honda GX Series engine           | 63734-20 |
| HW-300-M-UT 325 gallon, utility trailer, Honda GX Series engine        | 63734-10 |
| HW-300-M-S 325 gallon, stationary, Honda GX Series engine              | 63734-00 |

### Spare Parts and Accessories

| Description   | Part no. |
|---|----------|
| Basic Spare Parts Kit: diaphragm and flappers                                     | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware | 65060-00 |
| Bearing rod end assembly  | 64499-00 |
| Potty suction wand (up to 48")  | 62672-00 |
| Hose cage, fender mounted   | 62449-00 |

# Wastecorp Honey Wagon HW-100-200-32FA Series



## Enhanced Pumping Power Model - Up to 100' suction\*\*

Model HW-32FA-M-100-C - 100 gallon model shown on ATV wagon

### HW-100-200 Series

|                    |   |
|--------------------|---|
| Mounting options   | Turf tires, trailer mounted (shown), ATV wagon, utility/DOT trailer or stationary skid available  |
| Tank               | Your choice of 100, 150 or 200 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve                                      |
| Hoses and fittings | Non-collapsible hose with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect to marine pump out nozzle |
| Valve              | 3-way valve system to empty tank using pump Unit and discharge lay flat hose  |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation                                      |

### Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 2"   |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 13" dia. fabric reinforced                             |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

### Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 50 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia or 50% by volume        |

### HW-100-200-3FA Series Model Selection

| Model   | Part no. |
|---|----------|
| HW-32FA-EC-100-S - 100 gallon, skid mounted, electric       | 65170-00 |
| HW-32FA-EC-100-C - 100 gallon, ATV cart, electric           | 65170-10 |
| HW-32FA-EC-100-UT - 100 gallon, utility trailer, electric   | 65170-20 |
| HW-32FA-EC-100-TT - 100 gallon, turf tire trailer, electric | 65170-30 |
| HW-32FA-M-100-S - 100 gallon, skid mounted, gas engine      | 65171-00 |
| HW-32FA-M-100-C - 100 gallon, ATV cart, engine              | 65171-10 |
| HW-32FA-M-100-UT - 100 gallon, utility trailer, engine      | 65171-20 |
| HW-32FA-M-100-TT - 100 gallon, turf tire trailer, engine    | 65171-30 |

### Spare Parts and Accessories

| Description   | Part no. |
|---|----------|
| Basic Spare Parts Kit: Diaphragm, flappers only                                   | 61287-00 |
| Comprehensive Spare Parts Kit: Diaphragm, flappers, weights, gaskets and hardware | 61286-00 |
| Bearing rod end assembly  | 64499-00 |
| Hose Non-collapsible EPDM, yellow, tiger tail 1.5" x 30 ft c/w C&E camlocks       | 62264-00 |
| Potty suction wand (up to 2x48" L)  | 62679-00 |
| Universal RV sewer adapter  | 64042-00 |

### Coatings for Salt Water Environments

| Description                                | Part no. |
|--|----------|
| Pump internal wet section coating PTFE-DFL | 65156-50 |
| Pump internal wet section coating, Xylan   | 65156-60 |

\*\* Pumping capabilities are determined by fluid thickness, solids content, discharge distance and elevation. Contact a Wastecorp technical support representative for assistance with your application.



## Wastecorp Honey Wagon HW-300-32FA



### Enhanced Pumping Power Model - Up to 100' suction\*\*

Shown: HW-300-32FA Series with 325 gallon tank, Mud Sucker 3FA Series, diaphragm pump technology, 2" discharge line, DOT approved, galvanized frame/deck. Up to 100' of suction power\*\*

#### HW-300-32FA Series

|                    |   |
|--------------------|---|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Turf Tire Trailer:</b> wider tires to reduce impact on landscaping <b>Utility Trailer:</b> not for public roads <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose stand, painted |
| Tank               | 325 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve   |
| Hoses and Fittings | Non-collapsible hose with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect to marine pump out nozzle   |
| Valve              | 3-way valve system to empty tank using pump Unit and discharge lay flat hose  |
| Applications       | Septic pumping services, marinas, State/Federal/Provincial parks, special events, emergency remediation   |

#### Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 2"   |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 13" dia. fabric reinforced                             |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

#### Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 50 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia. or 50% by volume       |

#### HW-300-32FA Series Model Selection

| Model   | Part no. |
|---|----------|
| HW-32FA-EC-300-S- 325 gallon, skid mounted, electric        | 65176-00 |
| HW-32FA-EC-300-DT- 325 gallon, DOT trailer, electric        | 65176-10 |
| HW-32FA-EC-300-UT- 325 gallon, utility trailer, electric    | 65176-20 |
| HW-32FA-EC-300-TT - 325 gallon, turf tire trailer, electric | 65176-30 |
| HW-32FA-M-300-S- 325 gallon, skid mounted, engine driven    | 65177-00 |
| HW-32FA-M-300-DT- 325 gallon, DOT trailer, engine           | 65177-10 |
| HW-32FA-M-300-UT -325 gallon, utility trailer, engine       | 65177-20 |
| HW-32FA-M-300-TT- 325 gallon, turf tire trailer, engine     | 65177-30 |

#### Spare Parts and Accessories

| Description   | Part no. |
|---|----------|
| Basic Spare Parts Kit: Diaphragm, flappers only                                   | 61287-00 |
| Comprehensive Spare Parts Kit: Diaphragm, flappers, weights, gaskets and hardware | 61286-00 |
| Bearing rod end assembly  | 64499-00 |
| Hose Non-collapsible, yellow, tiger tail 1.5" x 30 ft c/w C&E camlocks            | 62264-00 |
| Potty suction wand (up to 2" x 48" L)   | 62672-00 |
| Universal RV sewer adapter  | 64042-00 |

#### Accessories for Salt Water Environments

| Description                                | Part no. |
|--|----------|
| Pump internal wet section coating PTFE-DFL | 65156-50 |
| Pump internal wet section coating, Xylan   | 65156-60 |

\*\* Pumping capabilities are determined by fluid thickness, solids content, discharge distance and elevation. Contact a Wastecorp technical support representative for assistance with your application.





*HW-300 -UT Series shown here at a marina for bilge transfer, pumping out boats/yachts. Includes a 325 gallon tank and universal marine attachments. Off road trailer shown for use on site. DOT trailers also available.*



# Wastecorp Honey Wagon HW-500



Shown: HW-500-M-DT 525 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck.

## HW-500 Series

|                    |   |
|--------------------|---|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Utility trailer:</b> not for public roads <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose cage |
| Tank               | 525 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve   |
| Hoses and Fittings | Qty: 2 - non-collapsible EPDM Hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories  |
| Valve              | 3-way valve system to empty tank using pump unit and discharge hose   |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation  |

## Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 1.5" or 2"   |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | 7" dia. fabric reinforced                              |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

## Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 20 GPM                          |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | 1½" dia or 50% by volume        |

## HW-500 Series Model Selection

| Model  | Part no. |
|--|----------|
| HW-500-EC-DT 525 gallon, DOT approved trailer mounted, electric motor, | 63735-20 |
| HW-500-EC-UT 525 gallon, utility trailer, electric motor               | 63735-10 |
| HW-500-EC-S 525 gallon, stationary, electric motor                     | 63735-00 |
| HW-500-M-DT 525 gallon, DOT approved, Honda GX Series engine           | 63736-20 |
| HW-500-M-UT 525 gallon, utility trailer, Honda GX Series engine        | 63736-10 |
| HW-300-M-S 525 gallon, stationary, Honda GX Series engine              | 63736-00 |

## Spare Parts and Accessories

| Description  | Part no. |
|--|----------|
| Basic Spare Parts Kit: diaphragm and flappers  | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware      | 65060-00 |
| Potty Suction Wand 2" x 24" L  | 63244-00 |
| Bearing rod end and crank arm assembly   | 62830-00 |
| Universal RV sewer adapter kit   | 64042-00 |
| Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included) | 63635-00 |

# Wastecorp Honey Wagon HW-1000



Shown: HW-1000-M-3FA-DT 1025 gallon tank, Mud Sucker Diaphragm Pump technology model 3FA-M (3" pump), DOT approved, galvanized frame and deck + hose cage.

## HW-1000 Series

|                    |   |
|--------------------|---|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose stand or optional hose cage, painted        |
| Tank               | 1025 gallon horizontal polyethylene tank with vent, bulk head fitting and discharge drain valve. Optional: 1035 gallon or 1335 gallon elliptical leg tank   |
| Hoses and Fittings | Qty: 2 - non-collapsible EPDM hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps) |
| Valve              | 3-way valve system to empty tank using pump unit and discharge hose   |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation  |

## Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 2", 3" or 4" (custom spec)                             |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | Size based on pump selected                            |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

## Performance Range

|                     |                                 |
|---------------------|---------------------------------|
| Max. capacity       | 20-110 GPM                      |
| Max. suction lift   | 20' vertical or 75' horizontal  |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling     | Varies based on pump selected   |

## HW-1000 Series - 2" Pump Model Selection

| Model  | Part no. |
|--|----------|
| HW-1000-EC-DT 1025 gallon tank, DOT approved trailer mounted, electric motor | 64244-20 |
| HW-1000-EC-S 1025 gallon tank, stationary, electric motor                    | 64244-00 |
| HW-1000-M-DT 1025 gallon tank, DOT approved, Honda GX Series engine          | 64033-10 |
| HW-1000-M-S 1025 gallon, stationary, Honda GX Series engine                  | 64033-00 |

## HW-1000 Series - 3" Pump Model Selection

| Model   | Part no. |
|---|----------|
| HW-1000-EC-DT - 3" pump, 1025 gallon tank, DOT approved trailer mounted, electric motor | 64259-20 |
| HW-1000-EC-S - 3" pump, 1025 gallon tank, stationary, electric motor                    | 64259-00 |
| HW-1000-M-DT - 3" pump, 1025 gallon tank, DOT approved, Honda GX Series engine          | 64032-20 |
| HW-1000-M-S - 3" pump, 1025 gallon tank, stationary, Honda GX Series engine             | 64032-00 |

## Spare Parts and Accessories

| Description  | Part no. |
|--|----------|
| Basic Spare Parts Kit: diaphragm and flappers  | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware      | 65060-00 |
| Potty Suction Wand 3" x 36" L  | 63305-00 |
| Bearing rod end and crank arm assembly   | 62830-00 |
| Universal RV sewer adapter kit   | 64042-00 |
| Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included) | 63635-00 |



# Wastecorp Honey Wagon HW-1600



Shown: HW-1600-M-DT 1035 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck. Hose cage mounted on fender.

## HW-1600 Series

|                    |   |
|--------------------|---|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose stand, painted                              |
| Tank               | 1635 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve  |
| Hoses and Fittings | Qty: 2 - Non-collapsible EPDM hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps) |
| Valve              | 3-way valve system to empty tank using pump Unit and discharge hose   |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation  |

## Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 2", 3" or 4"   |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Aluminum (ASTM A356)                                   |
| Diaphragm               | Varies depending on pump                               |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

## Performance Range

|                     |                                   |
|---------------------|-----------------------------------|
| Max. capacity       | 20-110 GPM                        |
| Max. suction lift   | 20' vertical or 75' horizontal    |
| Max. discharge head | 50' vertical or 300' horizontal   |
| Solids handling     | Varies depending on pump selected |

## HW-1600 Series 2" Pump Model Selection

| Model  | Part no. |
|--|----------|
| HW-1600-EC-DT 1635 gallon, DOT approved trailer mounted, electric motor, | 64246-20 |
| HW-1600-EC-S 1635 gallon, stationary, electric motor                     | 64246-00 |
| HW-1600-M-DT 1635 gallon DOT approved, Honda GX Series engine            | 64250-20 |
| HW-1600-M-S 1635 gallon stationary, Honda GX Series engine               | 64250-00 |

## HW-1600 Series 3" Pump - Model Selection

| Model   | Part no. |
|---|----------|
| HW-1600-EC-DT - 3" pump, 1635 gallon tank, DOT approved trailer mounted, electric motor | 64262-20 |
| HW-1000-EC-S - 3" pump, 1635 gallon tank, stationary, electric motor                    | 64262-00 |
| HW-1600-M-DT - 3" pump, 1635 gallon tank, DOT approved, Honda GX Series engine          | 64254-20 |
| HW-1600-M-S - 3" pump, 1635 gallon tank, stationary, Honda GX Series engine             | 64254-00 |

## Spare Parts and Accessories

| Description  | Part no. |
|--|----------|
| Basic Spare Parts Kit: diaphragm and flappers  | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware      | 65060-00 |
| Potty Suction Wand 3" x 48" L  | 63307-00 |
| Bearing rod end and crank arm assembly   | 62830-00 |
| Universal RV sewer adapter kit   | 64042-00 |
| Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included) | 63635-00 |
| Premium high side tool box (aluminum)  | 62867-00 |
| Fire extinguisher  | 62868-00 |
| Cover, fire extinguisher   | 62870-00 |

# Wastecorp Honey Wagon HW-2000-5000



Shown: HW-2500-M-DT 2500 gallon tank on a dually trailer with a Mud Sucker 3B-M-DD pump rated for up to 220 GPM.

## HW-2000-5000 Series

|                    |   |
|--------------------|---|
| Mounting options   | <b>DOT approved:</b> electric brakes, galvanized deck/frame, lighting package. <b>Stationary base:</b> Fabricated steel stationary skid base with fabricated steel hose cage  |
| Tank               | 2000-5000 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve   |
| Hoses and Fittings | Qty: 2 - Non-collapsible EPDM hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps) |
| Valve              | 3-way valve system to empty tank using pump unit and discharge hose   |
| Applications       | Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation  |

## Pump and Motor Specifications

|                         |  |
|-------------------------|--|
| Connection size         | 2", 3" or 4" (custom spec)                             |
| Max. liquid temperature | 140°F (60°C) continuous                                |
| Pump body casing        | Marine grade aluminum (ASTM A356)                      |
| Diaphragm               | Varies depending on pump                               |
| Flapper valves          | Fabric reinforced                                      |
| Gearbox                 | SEW Eurodrive or Siemens                               |
| Motor options           | Electric, gas, diesel, air, hydraulic, explosion proof |

## Performance Range

|                     |                                |
|---------------------|--------------------------------|
| Max. capacity       | Varies depending on pump model |
| Max. suction lift   | Varies depending on pump model |
| Max. discharge head | Varies depending on pump model |
| Solids handling     | Varies depending on pump model |

## HW-2000 Series - 2" Pump Model Selection

| Model  | Part no. |
|--|----------|
| HW-2000-EC-DT 2035 gallon, DOT approved trailer mounted, electric motor, | 64247-20 |
| HW-2000-EC-S 2035 gallon, stationary, electric motor                     | 64247-00 |
| HW-2000-M-DT 2035 gallon, DOT approved, Honda GX Series engine           | 64252-20 |
| HW-2000-M-S 2035 gallon, stationary, Honda GX Series engine              | 64252-00 |

## HW-2000 Series - 3" Pump Model Selection

| Model   | Part no. |
|---|----------|
| HW-2000-EC-DT - 3" pump, 2035 gallon tank, DOT approved trailer mounted, electric motor | 64263-20 |
| HW-2000-EC-S - 3" pump, 2035 gallon tank, stationary, electric motor                    | 64263-00 |
| HW-2000-M-DT - 3" pump, 2035 gallon tank, DOT approved, Honda GX Series engine          | 65186-00 |
| HW-2000-M-S - 3" pump, 2035 gallon tank, stationary, Honda GX Series engine             | 65186-20 |

## Spare Parts and Accessories

| Description  | Part no. |
|--|----------|
| Basic Spare Parts Kit: diaphragm and flappers  | 65062-00 |
| Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware      | 65060-00 |
| Potty Suction Wand: 3" x 24" L   | 63305-00 |
| Bearing rod end and crank arm assembly   | 62830-00 |
| Universal RV sewer adapter kit   | 64042-00 |
| Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included) | 63635-00 |
| Premium high side tool box (aluminum)  | 62867-00 |
| Fire extinguisher  | 62866-00 |
| Cover, fire extinguisher   | 62870-00 |

# WASTE CONTAINMENT + FRESH WATER DISTRIBUTION. AN ALL-IN-ONE WINNER. WASTECORP HW-RECOVERY SERIES.


Wastecorp's dual waste containment + fresh water distribution systems helps you improve productivity on your job site by helping you pump out waste and provide water all in one system. Our systems include a dual pump system - a Mud Sucker® diaphragm pump to collect wastewater and a high pressure water delivery pump for fresh water distribution or wash down services. You select the tank combination that is right for you and the pump sizes so you get the performance you need.

## Applications

- Where sanitary hose lines and tanks are critical
- Ideal to pump out lagoons, RVs, portable toilets, septic tanks commercial or leisure vessels or locomotive holding tanks and more

## Benefits

- Provides the ultimate in sanitation
- Rear discharge for quick wastewater removal
- Step decks for easy hose inspection and maintenance
- Heavy duty hose rack

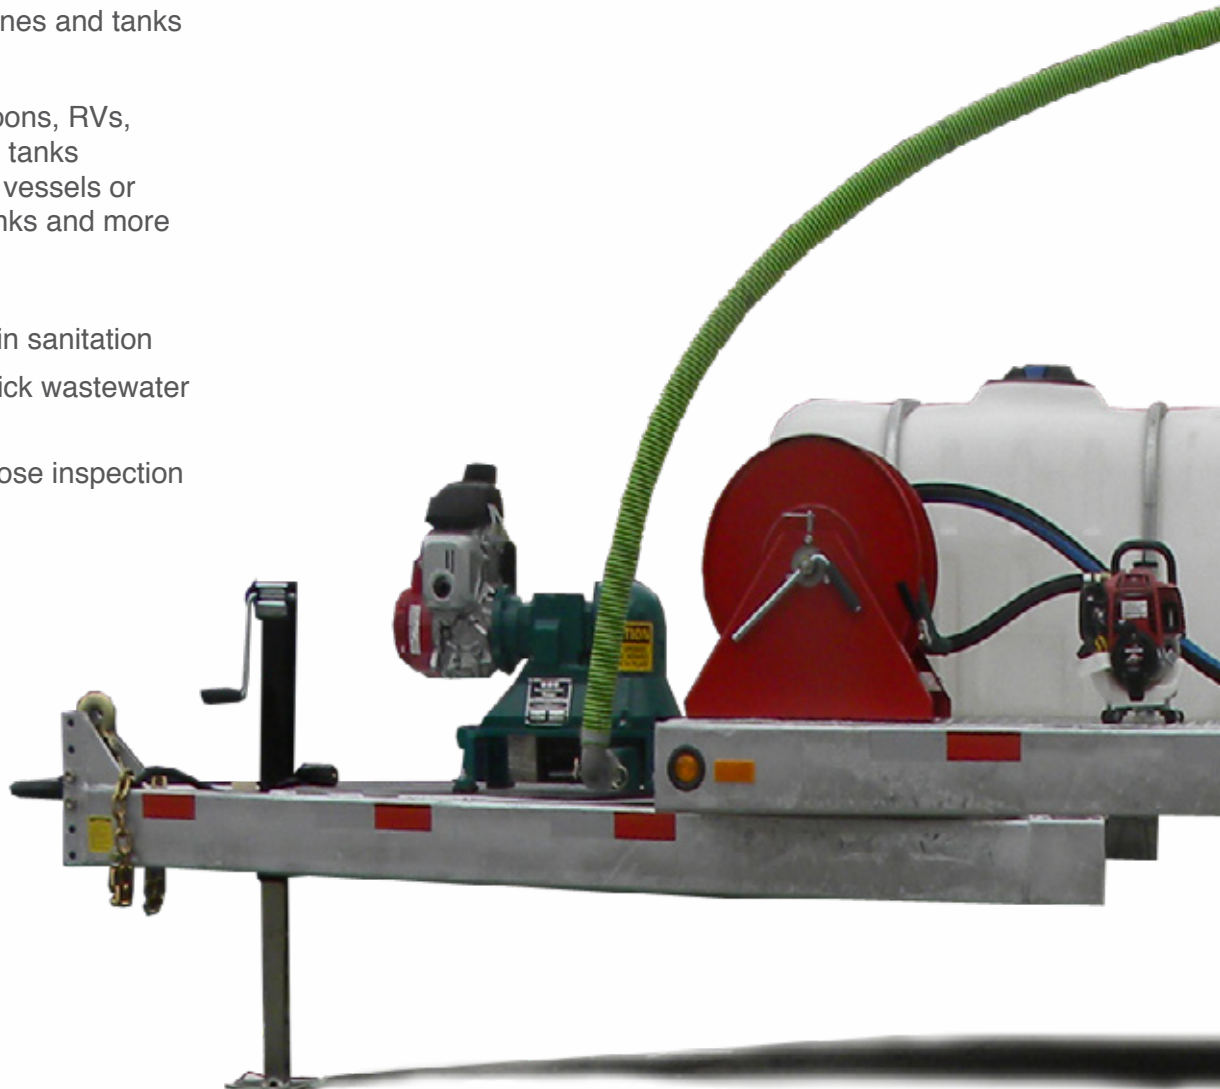






Waste pump and fresh water pump



Standard hose bin

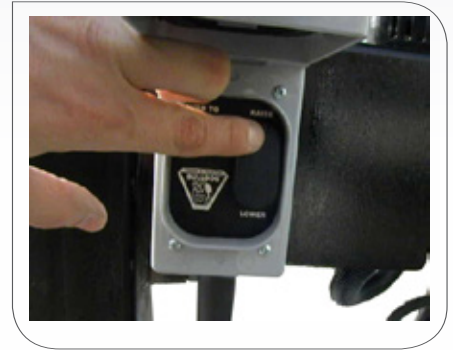

Optional features like automated jacks



# SKID MOUNTED PUMP OUT SYSTEMS. VERSATILE. HIGH QUALITY. MOUNT ANYWHERE.

Skid mounted pump out systems from Wastecorp offer a variety of tank sizes and configurations to fit your application. Whether you are mounting on a truck, concrete pad or moving it frequently with a forklift, you'll get the high quality construction coupled with Mud Sucker pump technology that you need.



Rear mounted pump with dual fork hose stand



Side mounted pump with hose ring mounted above.



Rear mounted pump with hose stand configured close to pump. 725 gallon and higher sizes only.



Front mounted pump with no hose stand. May be suitable for confined spaces.

With a variety of configuration options, Wastecorp's skid mounted honey wagons can be mounted almost anywhere such as golf carts, pump out boats and more.



Choice of five drive systems



Standard three way valve system



Professional grade hose package



## Waste + Water Tank



| Part #   | Model                   | Description  |
|----------|-------------------------|--|
| 64276-10 | HW-2FA-EC-325-100 (ST)  | 325 gallon waste tank, electric motor, skid mounted, 100 gallon rinse tank |
| 64276-15 | HW-2FA-EC-325-150 (ST)  | 325 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank |
| 64276-00 | HW-2FA-EC-325-50 (ST)   | 325 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank  |
| 64277-10 | HW-2FA-EC-525-100(ST)   | 525 gallon waste tank, electric motor, skid mounted, 100 gallon rinse tank |
| 64277-15 | HW-2FA-EC-525-150(ST)   | 525 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank |
| 64277-00 | HW-2FA-EC-525-50(ST)    | 725 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank  |
| 64130-10 | HW-2FA-EC-725-100 (DOT) | 725 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank  |
| 64278-10 | HW-2FA-EC-725-100(ST)   | 725 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank |
| 64130-15 | HW-2FA-EC-725-150 (DOT) | 725 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank  |
| 64278-15 | HW-2FA-EC-725-150(ST)   | 725 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank |
| 64130-00 | HW-2FA-EC-725-50 (DOT)  | 725 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank   |
| 64278-00 | HW-2FA-EC-725-50(ST)    | 725 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank  |
| 64279-10 | HW-2FA-M-325-100(ST)    | 325 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank  |
| 64279-15 | HW-2FA-M-325-150(ST)    | 325 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank  |
| 64279-00 | HW-2FA-M-325-50(ST)     | 325 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank   |
| 64280-10 | HW-2FA-M-525-100(ST)    | 525 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank  |
| 64280-15 | HW-2FA-M-525-150(ST)    | 525 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank  |
| 64280-00 | HW-2FA-M-525-50(ST)     | 525 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank   |
| 64281-10 | HW-2FA-M-725-100(ST)    | 725 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank  |
| 64281-15 | HW-2FA-M-725-150(ST)    | 725 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank  |
| 64281-00 | HW-2FA-M-725-50(ST)     | 725 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank   |
| 64396-00 | HW-2FA-M-200-150-DOT    | 200 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank   |
| 64282-10 | HW-2FA-EC-325-100 DT    | 325 gallon waste tank, engine driven, DOT Trailer, 100 gallon rinse tank   |
| 64282-15 | HW-2FA-EC-325-150 DT    | 325 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank  |
| 64282-00 | HW-2FA-EC-325-50 DT     | 325 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank   |
| 64283-10 | HW-2FA-EC-525-100 DT    | 525 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank  |
| 64283-15 | HW-2FA-EC-525-150 DT    | 525 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank  |
| 64283-00 | HW-2FA-EC-525-50 DT     | 525 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank   |
| 64284-10 | HW-2FA-M-325-100 DT     | 325 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank  |
| 64284-15 | HW-2FA-M-325-150 DT     | 325 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank   |
| 64284-00 | HW-2FA-M-325-50 DT      | 325 gallon waste tank, engine driven, DOT Trailer, 50 gallon rinse tank    |
| 64285-10 | HW-2FA-M-525-100 DT     | 525 gallon waste tank, engine driven, DOT Trailer, 100 gallon rinse tank   |
| 64285-15 | HW-2FA-M-525-150 DT     | 525 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank   |
| 64285-00 | HW-2FA-M-525-50 DT      | 525 gallon waste tank, engine driven, DOT Trailer, 50 gallon rinse tank    |

## Skid Mounted Waste Tank Models



| Part #   | Model                         | Description                               |
|----------|-------------------------------|---|
| 64387-00 | HW-1.5FA-EC-50 (ELECTRIC)     | 50 gallon, electric with 1½" connection   |
| 63262-00 | HW-1.5FA-H-50                 | 50 gallon, manual with 1½" connection     |
| 63686-00 | HW-1.5FA-M-50 (ENGINE DRIVEN) | 50 gallon, engine with 1½" connection     |
| 63258-00 | HW-2FA-AP-50                  | 50 gallon, air driven with 1½" connection |
| 63254-10 | HW-2FA-EC-50                  | 50 gallon, electric with 2" connection    |
| 63682-10 | HW-2FA-H-50                   | 50 gallon, manual with 2" connection      |
| 63250-10 | HW-2FA-M-50                   | 50 gallon, engine with 2" connection      |
| 63688-10 | HW-2FA-H-150                  | 150 gallon, manual with 2" connection     |
| 63260-10 | HW-2FA-M-150                  | 150 gallon, engine with 2" connection     |
| 63257-10 | HW-1.5FA-EC-200               | 200 gallon, electric with 1½" connection  |
| 63685-10 | HW-1.5FA-H-200                | 200 gallon, manual with 1½" connection    |
| 63253-10 | HW-1.5FA-M-200                | 200 gallon, engine with 1½" connection    |
| 63265-10 | HW-2FA-EC-200                 | 200 gallon, electric with 2" connection   |
| 63689-10 | HW-2FA-H-200                  | 200 gallon, manual with 2" connection     |
| 63261-10 | HW-2FA-M-200                  | 200 gallon, engine with 2" connection     |
| 63730-15 | HW-2FA-EC-325-S               | 325 gallon, electric with 2" connection   |
| 63730-20 | HW-2FA-M-325-S                | 325 gallon, engine with 2" connection     |
| 63262-10 | HW-2FA-EC-525-S               | 525 gallon, electric with 2" connection   |
| 63735-20 | HW-2FA-M-525-S                | 525 gallon, engine with 2" connection     |
| 63736-20 | HW-3FA-M-525-S                | 525 gallon, engine with 3" connection     |
| 63737-20 | HW-2FA-M-725-S                | 725 gallon, engine with 2" connection     |
| 63737-00 | HW-2FA-EC-1035-S              | 1035 gallon, electric with 2" connection  |
| 63737-10 | HW-2FA-EC-1335-S              | 1335 gallon, electric with 2" connection  |
| 64487-00 | HW-2FA-EC-1635-S (STATIONARY) | 1635 gallon, electric with 2" connection  |
| 64140-00 | HW-2FA-EC-2035-S (STATIONARY) | 2035 gallon, electric with 2" connection  |
| 64244-00 | HW-2FA-M-1035-S (STATIONARY)  | 1035 gallon, engine with 2" connection    |
| 64245-00 | HW-2FA-M-1335-S (STATIONARY)  | 1335 gallon, engine with 2" connection    |
| 64246-00 | HW-2FA-M-1635-S (STATIONARY)  | 1335 gallon, engine with 2" connection    |
| 64247-00 | HW-2FA-M-2335-S (STATIONARY)  | 2335 gallon, engine with 2" connection    |
| 64248-00 | HW-3FA-EC-1025-S (STATIONARY) | 1025 gallon, electric with 3" connection  |
| 64250-00 | HW-3FA-EC-1335-S (STATIONARY) | 1335 gallon, electric with 3" connection  |
| 64251-00 | HW-3FA-EC-1635-S (STATIONARY) | 1635 gallon, electric with 3" connection  |
| 64259-00 | HW-3FA-EC-2035-S (STATIONARY) | 2035 gallon, electric with 3" connection  |
| 64260-00 | HW-3FA-M-1035-S (STATIONARY)  | 1035 gallon, engine with 3" connection    |
| 64261-00 | HW-3FA-M-1335-S (STATIONARY)  | 1335 gallon, engine with 3" connection    |
| 64262-00 | HW-3FA-M-1635-S (STATIONARY)  | 1635 gallon, engine with 3" connection    |



## Wastecorp Honey Wagon Sample Installations



HW-300-DT Series honey wagon waste containment system. Galvanized deck and frame, engine driven Mud Sucker pump technology. 325 gallon tank with DOT package (electric brakes and lighting package). This installation used to pump out RV black water tanks, portable toilets and septic waste.



HW-150-ATV Series portable waste recovery system. 150 gallon tank, ATV hitch for towing with (John Deere Gator, Kawasaki Mule, Polaris, Volunteer, Bobcat, etc). Three way valve system for pumping both into and out of the tank. Installation used by the National Guard to contain an oil spill from an industrial facility during a flood.





HW-725-100-DT Series Waste +Water tank system. 725 gallon waste tank and 100 gallon fresh water tank. Electric model. Two pumps included: Mud Sucker electric diaphragm pump technology and a TFX high pressure water pump. Fully galvanized deck and trailer frame, fender mounted industrial grade hose cage for storage. Installation used on a construction site for an industrial building site. Pumps out contaminated wastewater, fresh water used for site prep and to clean equipment and tools.



HW-2000 Series. 2035 gallon tank, dually trailer, dual jack, galvanized deck and frame. Mud Sucker mechanical AOD pump motor technology. Installation used on a US Army base for pumping out septic systems at remote training facility.

North America: 1-888-829-2783

Fax: 1-888-883-3320

Worldwide: +1-201-445-2882

Fax: +1-201-445-3252

E-mail: [info@wastecorp.com](mailto:info@wastecorp.com)

Internet: [www.wastecorp.com](http://www.wastecorp.com)

## **SELECT A HONEY WAGON DESIGNED FOR YOUR APPLICATION.**

Wastecorp is an ISO 9001 certified honey wagon manufacturer. Honey wagon waste containment and sanitation systems are available in several sizes ranging from 25 gallon (96 liters) to over 5000 gallon (18,900 liters) tank sizes. All models are designed for heavy use pumping applications at campgrounds, marinas, yacht clubs, commercial aviation, railroads, waste vegetable oil collection, industrial remediation pumping, municipal and military liquid waste containment, hydro power plant pumping and much more.



**WASTECORP.**  
**Pumps<sup>®</sup>**

Specifications, literature and illustrative material in this honey wagon brochure are accurate at the time of publication but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment. Wastecorp and globes are trademarks of WPI/Wastecorp Pumps. Wastecorp Pumps is the exclusive manufacturer of these brands worldwide under license. Marks are protected in North America and worldwide.

© 2019 WPI. V.1 All rights reserved. New York, NY 10024.  
NYC/West85 Djs Rev.01/19. Litho in the United States of America.  
For a complete engineering specification contact Wastecorp Pumps at  
1.888.829.2783 or by E-mail: [info@wastecorp.com](mailto:info@wastecorp.com).

Also on the web at <http://www.wastecorp.com>